


ROSH

Reversion	Discription	Date	Signed
A0	首次发行	24.07.04	Penglz

QSPI

PIN	DESCRIPTION
1	GND
2	TP-INT
3	TP-SDA
4	TP-SCL
5	LCD3.3V
6	TP-RST
7	GND
8	LCD3.3V
9	LCD3.3
10	VBAT
11	OLED_EN
12	GND
13	GND
14	LCD-RST
15	LCD-CS
16	LCD-DO
17	LCD-D1
18	GND
19	LCD-CLK
20	GND
21	D2
22	D3
23	TE
24	NC

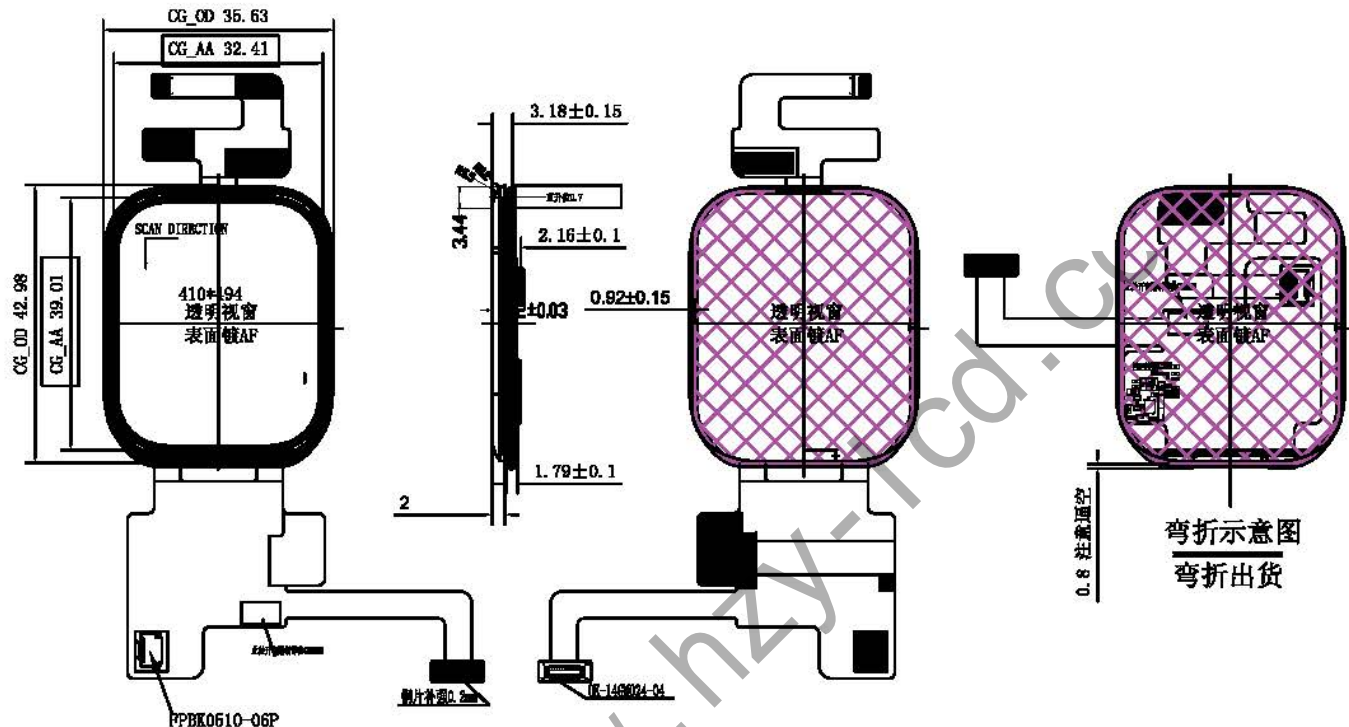

TP	SYMBOL
1	TP_GND
2	TP_INT
3	TP_SDA
4	TP_SCL
5	TP_RESSET
6	TP_VDD

- SPECIFICATIONS:
1. DISPLAY TYPE: AMOLED
  2. OPERATING TEMP: -20° C~70° C; STORAGE TEMP: -30° C~80° C
  3. MAIN LCD & DRIVER IC: BOE+SH8603B0
  4. OPTIMUM VIEWING ANGLE: ALL
  5. LUMINANCE= — cd/cm<sup>2</sup> (MIN), —cd/cm<sup>2</sup> (TYP)
  6. GENERAL TOLERANCE: ±0.2
  7. MARK\*~\* IS THE IMPORTANT DIMENSION, MARK\*△\* IS THE CHANGABLE DIMENSION
  8. ROHS COMPLIANCY
  11. 客户机壳上的泡棉需进入玻璃单边0.3MM (MIN), 防止漏光.
  12. 客户需保证触摸屏下表面到玻璃上表面最少0.3MM以上(非贴合)


**深圳市华之洋光电科技有限公司**  
 SHENZHEN HZY PHOTOELECTRIC TECHNOLOGY CO., LTD

Customer Ref.	Model No.	Drawing Title		AMOLED-1.99		
Part No.	Approve	Material	Unmarked Tolerance	Unit	Scale	Page
Drawing No.	Checked	LCM	±0.2	mm	—	1 of 1
	Draw	Penglz	Date	2024.07.04	Rev 00	