
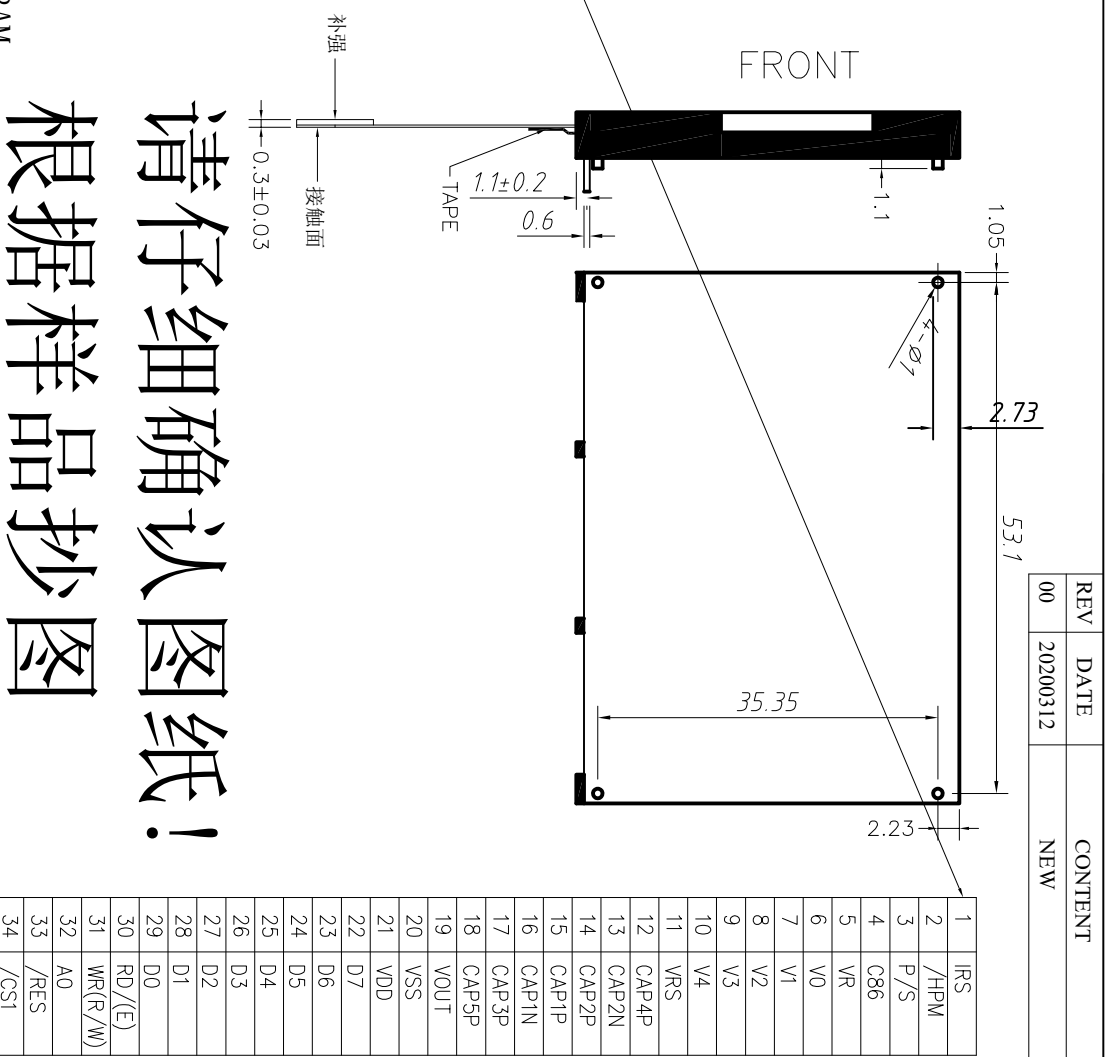



REV	DATE	CONTENT
00	20200312	NEW

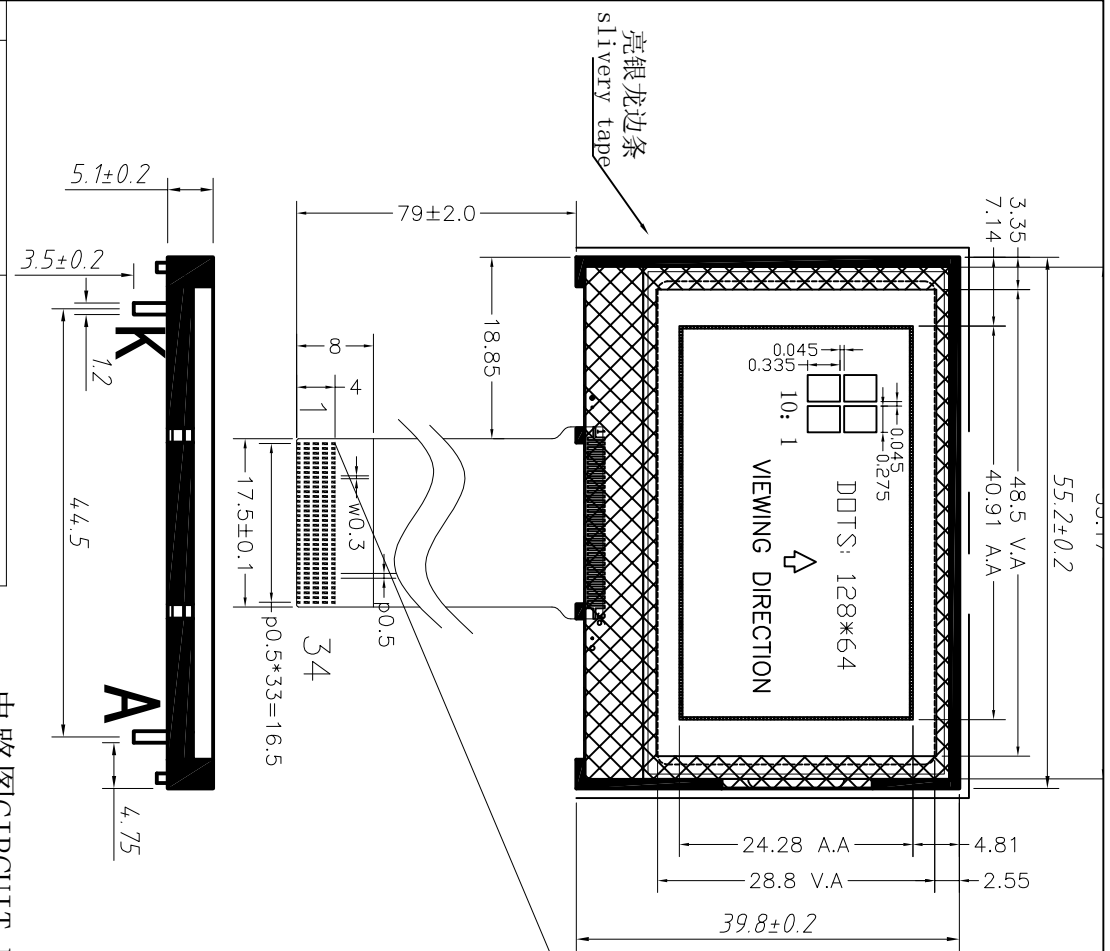

1	IRS
2	/HPM
3	P/S
4	C86
5	VR
6	V0
7	V1
8	V2
9	V3
10	V4
11	VRS
12	CAP4P
13	CAP2N
14	CAP2P
15	CAP1P
16	CAP1N
17	CAP3P
18	CAP5P
19	VOUT
20	VSS
21	VDD
22	D7
23	D6
24	D5
25	D4
26	D3
27	D2
28	D1
29	D0
30	RD/(E)
31	WR(R/W)
32	A0
33	/RES
34	/CS1

1	Lcd Type	FSTN,Positive
2	Viewing Direction	6 O'clock
3	Drive Method	1/6SD,1/9B
4	Polarizer Mode	TRANSELECTIVE
5	VDD/VOP	3.3V/9.6V
6	Operating Temperature	-20°C~70°C
7	Storage Temperature	-30°C~80°C
8	IC	ST7565P(COG)
9	Backlight	White
10	Environmental requirements	ROHS compliance

电路图CIRCUIT DIAGRAM  
(LED SMD 1 X 3 = 3 dies )

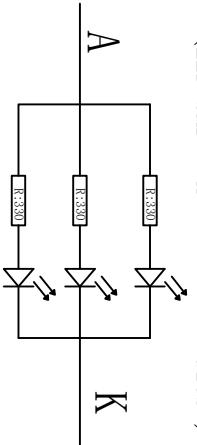

A-K=3.3V(TYPE),IF=45mA(TYPE)

请仔细确认图纸!  
根据样品抄图

The non-specified tolerance of dimension is±0.2mm.

SCALE:	1/1	UNIT:	mm	HZY Display CO.,	
REV:	V0	PAGE:	1/1	LCM DRAWING	
DRAW		XH		LCM DRAWING	
CHECK				TITLE	
APPROVE				LCM DRAWING	
				DWG NO. HO12864R7-WFH019-00	