
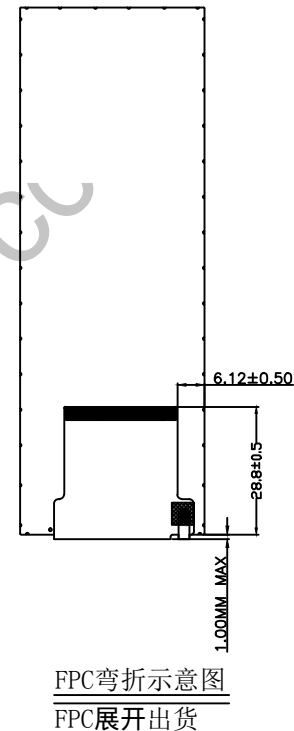
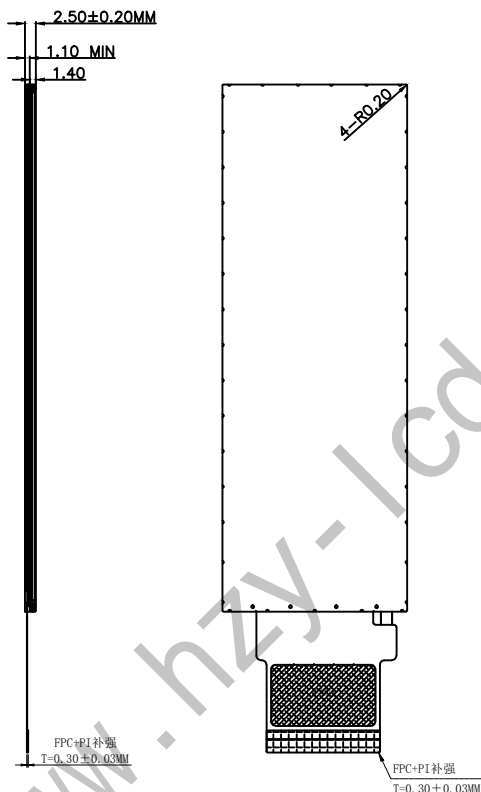


ROSH



Reversion	Discription	Date	Signed
A0	First	24.01.15	Allen

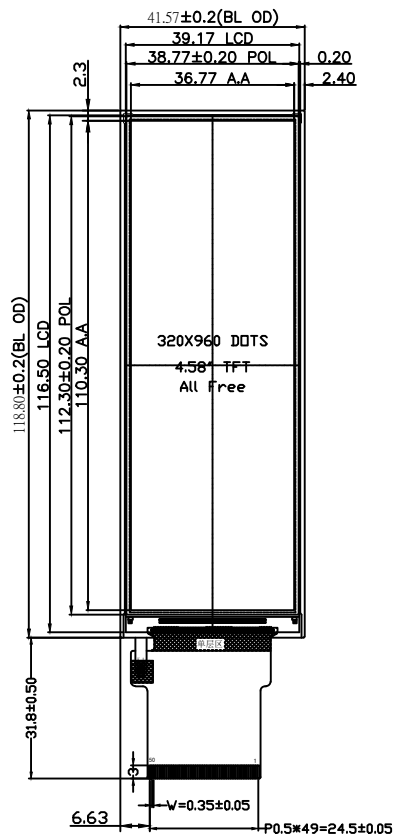

PIN	DESCRIPTION
1	LED K
2	LED A
3	GND
4	MIP1_D0N
5	MIP1_D0P
6	GND
7	MIP1_CLKN
8	MIP1_CLKP
9	GND
10	MIP1_D1N
11	MIP1_D1P
12	GND
13	VSYNC
14	HSYNC
15	DCLK
16	DE
17-24	B0-B7
25-32	G0-G7
33-40	R0-R7
41	RESX
42	CSX
43	SCL
44	SDA
45	SDO
46	IM0
47	IM1
48	IM2
49	IOVCC
50	VDD

NOTES:

1. DISPLAY TYPE: 4.58" TFT, TRANSMISSIVE
2. DRIVER IC: ST7701S
3. VIEWING DIRECTION: ALL
4. BACKLIGHT: 8 pcs White LED
5. BRIGHTNESS: TBD
6. INPUT CURRENT: VCC 2.8V(type)
7. OPERATING TEMP: -10° C ~ +60° C
8. STORAGE TEMP: -20° C ~ +70° C
9. UNDEFINED DIMENSION TOLERANCE: ±0.3mm
10. RoHS COMPLIABLY




深圳市华之洋光电科技有限公司
 SHENZHEN HZY PHOTOELECTRIC TECHNOLOGY CO., LTD

Customer Ref.	Model No.	Drawing Title		HZ046GPAS01-A0			
---	Approve	Material	Unmarked Tolerance	Unit	Scale	Page	
---	Checked	LCM	±0.3	mm	--	1 of 1	
---	Draw	Allen	Date	2024.01.15	Rev 00		