



ROSH

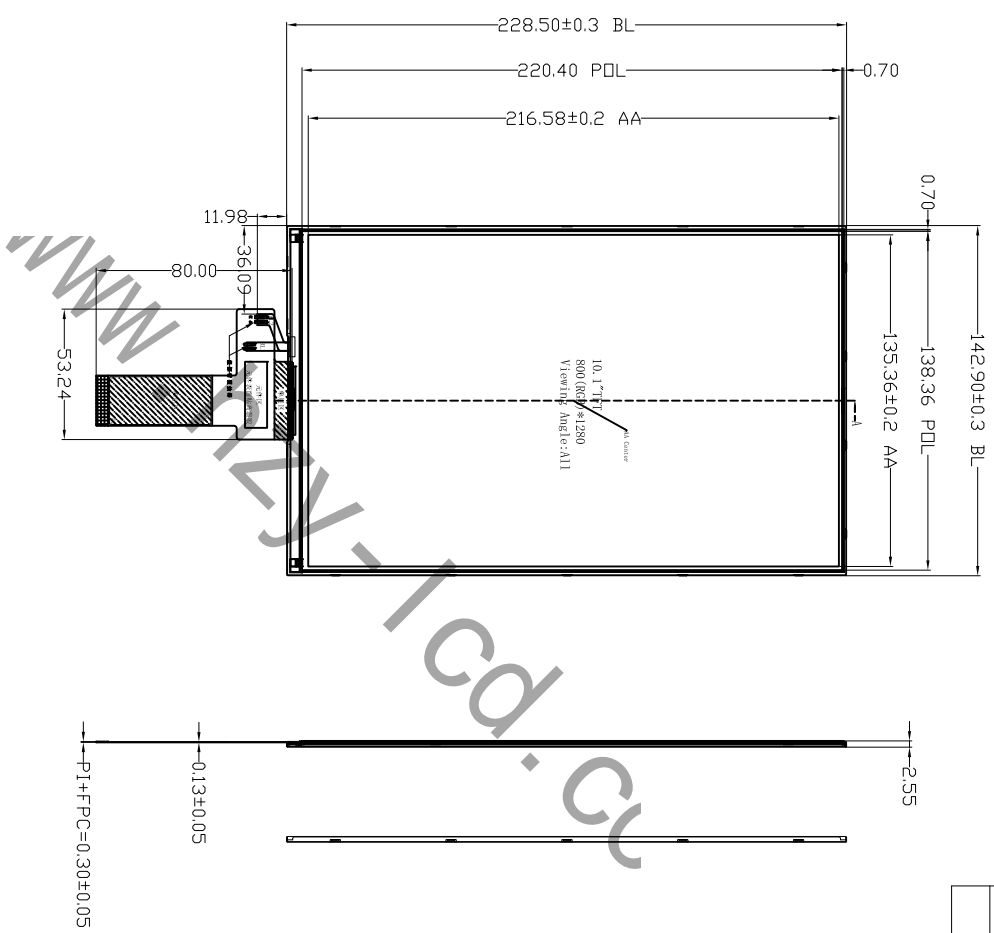

NOTES:

1. DISPLAY TYPE: 10.1" TFT, TRANSMISSIVE Normally Black
2. DRIVER IC: ILI9881C or compatible
3. VIEWING DIRECTION: A11
4. BACKLIGHT: - pcs White LED
5. BRIGHTNESS: -cd/m² (typ)
6. INPUT VOLTAGE: VCC 1.8V (typ)
7. OPERATING TEMP: -20° C ~ +70° C
8. STORAGE TEMP: -30° C ~ +80° C
9. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
10. ROHS COMPLIABLY

Backlight LED Circuit



Revision	Version	Description	Date	Signed
V0		首次发行	24.10.09	Penglz

PIN	DESCRIPTION
1	NC
2	VDD (V18)
3	VDD (V18)
4	GND
5	RESSET
6	NC
7	GND
8	MPI-0N
9	MPI-0P
10	GND
11	MPI-IN
12	GND
13	MPI-IP
14	MPI-GLAN
15	MPI-CLRP
16	GND
17	MPI-2N
18	MPI-2P
19	GND
20	MPI-3N
21	MPI-3P
22	GND
23	NC
24	NC
25	GND
26	NC
27	PMW0
28	NC
29	NC
30	GND
31	LEDB
32	LEDB
33	NC
34	NC
35	NC
36	NC
37	VCI (3V3)
38	NC
39	LEDA
40	LEDA

40PIN MIPPI

深圳市华之洋光电科技有限公司
 SHENZHEN HZY PHOTOELECTRIC TECHNOLOGY CO., LTD

Customer Ref.	Model No.	Drawing Title	Material	Unmarked Tolerance	Unit	Scale	Page
---	Approve	HZ101MPBY04-A0	LCM	±0.2	mm	---	1 of 1
Part No.	Checked	Date	2024.10.09	Rev	00		
Drawing No.	Draw	Penglz					