


ROSH


Revision	Dispersion	Date	Signed
01	First	2023.02.27	YP

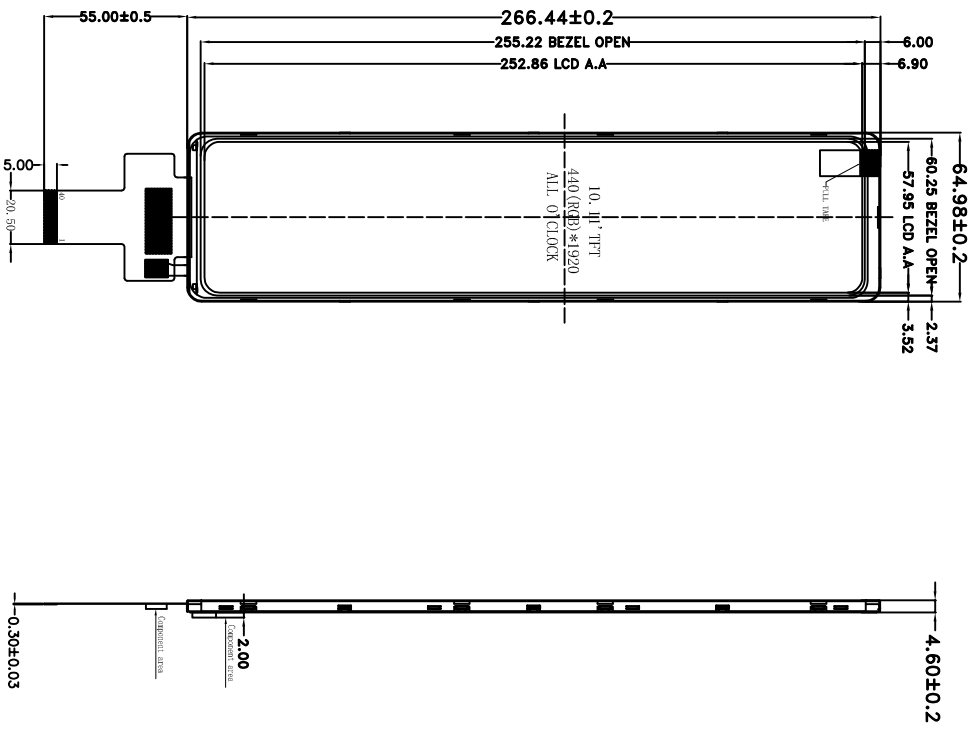

NO.	Pin name	NO.	Pin name
1	TP-VDD	33	AVDD
2	GND	34	AVDD
3	TP-RST	35	GND
4	TP-INT	36	LEDK
5	TP-SDA	37	LEDK
6	TP-SCL	38	NC
7	GND	39	LEDA
8	MPI-0N	40	LEDA
9	MPI-0P		
10	GND		
11	MPI-1N		
12	MPI- P		
13	GND		
14	MPI1-CKN		
15	MPI1-CKP		
16	GND		
17	MPI1-2N		
18	MPI1-2P		
19	GND		
20	MPI1-3N		
21	MPI1-3P		
22	GND		
23	NC		
24	TE		
25	RESET		
26	LED-PWM		
27	GND		
28	ID-VCC18V		
29	VDD3.3V		
30	AVEE		
31	AVEE		
32	GND		

NOTES:

1. DISPLAY TYPE: 10.11" TFT, TRANSMISSIVE
2. DRIVER IC: ST77031
3. VIEWING DIRECTION: ALL 0° CLOCK
4. BACKLIGHT: 16 pcs White LED
5. INPUT CURRENT: VCC 3.3V (type)
6. OPERATING TEMP: -20° C ~ +70° C
7. STORAGE TEMP: -30° C ~ +80° C
8. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
9. ROHS COMPLIABLY

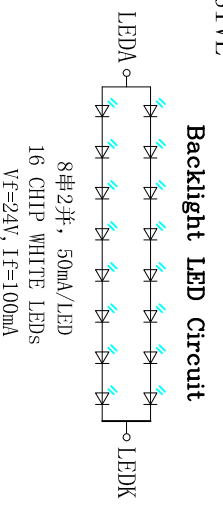

深圳市华之洋光电科技有限公司
Shenzhen HZY Photoelectric Technology Co., Ltd

Customer Ref.	Model No.	Drawing Title	HZ101RPPBS02-A0
Part No.	Approve	Material	Unmarked
Drawing No.	Checked	LCM	Tolerance
	Draw	Date	±0.2
		2023.02.27	mm
		Rev 00	Unit
			Scale
			Page
			1 of 1